


8.7/15(17.5) kV CV-SWA (CE Optional)*

IEC 60502-2 (3 CORE)

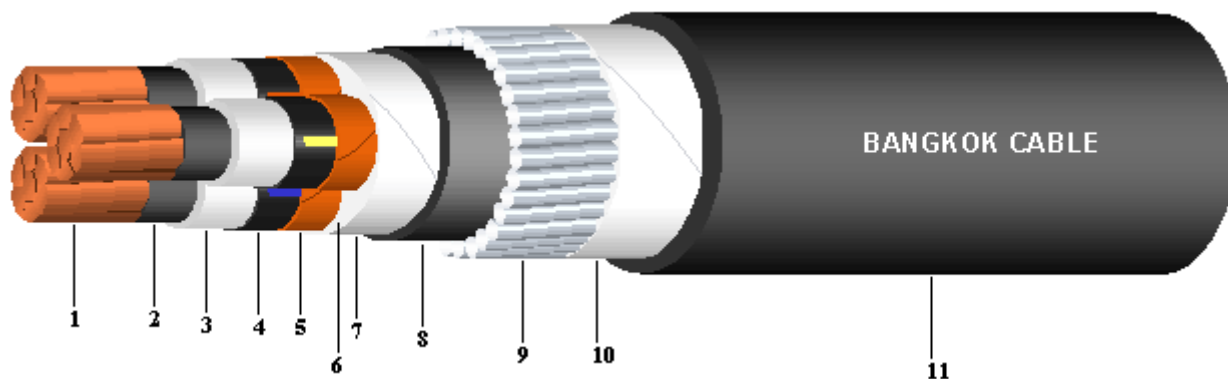

Construction :

1. Conductor : Compact round stranded annealed copper wires
2. Conductor screen : Semi-conductive Cross-linked polyethylene (XLPE) compound
3. Insulation : Cross-linked polyethylene (XLPE)
4. Insulation screen : Semi-conductive Cross-linked polyethylene (XLPE) compound
5. Metallic screen : Copper tape
6. Filler : Polypropylene (Non-hygroscopic material)
7. Binding tape : Polyester / Spunbond tape
8. Inner sheath : Polyvinyl chloride (PVC), (Optional : PE)*
9. Armour : Galvanized steel wires (Option : Steel tape)
10. Binding tape : Polyester / Spunbond tape
11. Outer sheath : Polyvinyl chloride (PVC), (Optional : PE)*

Application :

For general purpose power distribution in dry and wet location, installation in exposed, in conduit or duct or direct burial in ground.

Size	Conductor		Insulation thickness nominal	Diameter over insulation (Approx.)	Inner Sheath thickness nominal	Galvanized steel wire diameter	Diameter over armour (Approx.)	Outer Sheath thickness nominal	Overall diameter approx	Maximum DC. Conductor resistance at 20°C	Current rating in air	Cable weight (Approx.)	Standard length
	Number of wires (Min.)	Diameter (Approx.)											
mm ²		mm	mm	mm.	mm	mm	mm.	mm	mm	ohm/km	A	kg/km	m
25	6	5.90	4.5	16.4	1.4	2.50	48.0	2.6	56	0.727	145	5095	300
35	6	6.95	4.5	17.5	1.4	2.50	50.5	2.7	59	0.524	175	5640	300
50	6	8.33	4.5	18.8	1.5	2.50	53.5	2.8	62	0.387	210	6425	300
70	12	9.73	4.5	20.2	1.5	2.50	56.5	2.9	66	0.268	265	7420	300
95	15	11.43	4.5	21.9	1.6	2.50	60.5	3.1	70	0.193	320	8750	250
120	18	12.95	4.5	23.5	1.7	2.50	64.0	3.2	74	0.153	365	9990	200
150	18	14.27	4.5	24.8	1.7	3.15	68.0	3.3	79	0.124	415	12005	200
185	30	15.98	4.5	26.5	1.8	3.15	72.0	3.5	83	0.0991	470	13745	150
240	34	18.47	4.5	29.6	1.9	3.15	79.0	3.6	90	0.0754	550	16505	150
300	34	20.68	4.5	31.8	2.0	3.15	84.0	3.8	96	0.0601	620	19145	100