


0.6/1 kV CVV-SWA

IEC 60502-2 (2-30 CORE)

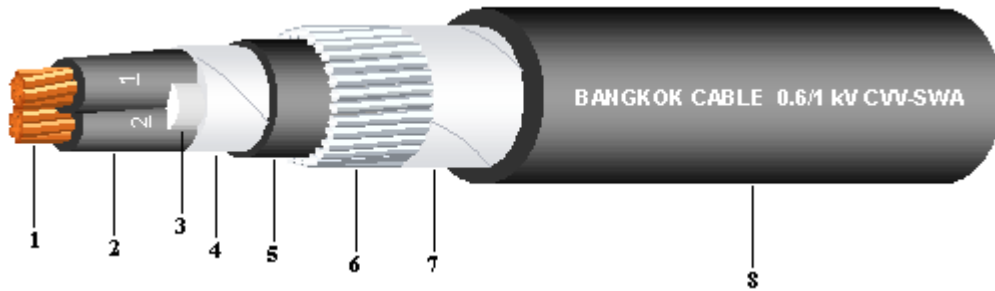

Construction :

1. Conductor : Concentric Stranded annealed copper wires
2. Insulation : Polyvinyl chloride (PVC), Black color
Identification: Printed White number on the surface of Black insulation
3. Filler : Non-hygroscopic material
4. Binding tape : Non-hygroscopic material
5. Inner sheath : Polyvinyl chloride (PVC), Black color
6. Armour : Galvanized steel wire
7. Binding tape : Suitable tape
8. Outer sheath : Polyvinyl chloride (PVC), Black color

Application :

For use in duct, tray and for direct burial in ground. The cable subject to immerse in water all the line.

No. of core	Conductor			Thickness of insulation (Nominal) mm	Thickness of inner Sheath (Approx.) mm	Diameter of steel wire armour (Nominal) mm	Thickness of outer Sheath (Nominal) mm	Overall diameter (Approx.) mm	Maximum conductor resistance (at 20°C) Ohm/km	Minimum insulation resistance (at 70°C) M Ohm/km	Cable weight (Approx.) kg/km	Standard Length m
	Nominal cross-sectional area sq.mm	No. & dia. of wires No./mm	Diameter (Approx.) mm									
2	0.5	7/0.30	0.90	0.8	1.0	0.8	1.8	14.5	36.0	0.0162	300	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.8	1.8	15.0	24.5	0.0142	320	500/D
	1	7/0.43	1.29	0.8	1.0	0.8	1.8	15.5	18.1	0.0128	340	500/D
	1.5	7/0.52	1.56	0.8	1.0	0.8	1.8	16.0	12.1	0.0112	370	500/D
	2.5	7/0.67	2.01	0.8	1.0	0.8	1.8	17.0	7.41	0.0093	430	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	20.0	4.61	0.0092	670	500/D
	6	7/1.04	3.12	1.0	1.0	1.25	1.8	21.0	3.08	0.0078	760	500/D
3	0.5	7/0.30	0.90	0.8	1.0	0.8	1.8	15.0	36.0	0.0162	320	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.8	1.8	15.5	24.5	0.0142	350	500/D
	1	7/0.43	1.29	0.8	1.0	0.8	1.8	16.0	18.1	0.0128	370	500/D
	1.5	7/0.52	1.56	0.8	1.0	0.8	1.8	16.5	12.1	0.0112	410	500/D
	2.5	7/0.67	2.01	0.8	1.0	0.8	1.8	17.5	7.41	0.0093	480	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	20.5	4.61	0.0092	750	500/D
	6	7/1.04	3.12	1.0	1.0	1.25	1.8	22.0	3.08	0.0078	870	500/D
4	0.5	7/0.30	0.90	0.8	1.0	0.8	1.8	16.0	36.0	0.0162	360	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.8	1.8	16.5	24.5	0.0142	390	500/D
	1	7/0.43	1.29	0.8	1.0	0.8	1.8	17.0	18.1	0.0128	420	500/D
	1.5	7/0.52	1.56	0.8	1.0	0.8	1.8	17.5	12.1	0.0112	460	500/D

	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	19.5	7.41	0.0093	660	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	22.0	4.61	0.0092	860	500/D
	6	7/1.04	3.12	1.0	1.0	1.25	1.8	23.5	3.08	0.0078	1010	500/D
5	0.5	7/0.30	0.90	0.8	1.0	0.8	1.8	16.5	36.0	0.0162	400	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.8	1.8	17.5	24.5	0.0142	430	500/D
	1	7/0.43	1.29	0.8	1.0	0.8	1.8	18.0	18.1	0.0128	470	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	19.5	12.1	0.0112	640	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	20.5	7.41	0.0093	760	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	23.5	4.61	0.0092	990	500/D
	6	7/1.04	3.12	1.0	1.0	1.25	1.8	25.0	3.08	0.0078	1170	500/D
6	0.5	7/0.30	0.90	0.8	1.0	0.80	1.8	17.5	36.0	0.0162	420	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.80	1.8	18.0	24.5	0.0142	470	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	19.5	18.1	0.0128	620	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	20.5	12.1	0.0112	690	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	22.0	7.41	0.0093	820	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	25.0	4.61	0.0092	1070	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.8	27.0	3.08	0.0078	1420	500/D
7	0.5	7/0.30	0.90	0.8	1.0	0.8	1.8	17.5	36.0	0.0162	430	500/D
	0.75	7/0.37	1.11	0.8	1.0	0.8	1.8	18.0	24.5	0.0142	480	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	19.5	18.1	0.0128	630	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	20.5	12.1	0.0112	700	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	22.0	7.41	0.0093	840	500/D
	4	7/0.85	2.55	1.0	1.0	1.25	1.8	25.0	4.61	0.0092	1100	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.8	27.0	3.08	0.0078	1470	500/D
8	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	19.5	36.0	0.0162	580	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	20.0	24.5	0.0142	640	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	20.5	18.1	0.0128	690	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	21.5	12.1	0.0112	770	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	23.0	7.41	0.0093	930	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	27.0	4.61	0.0092	1370	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.8	29.0	3.08	0.0078	1640	500/D
9	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	20.0	36.0	0.0162	640	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	21.0	24.5	0.0142	700	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	21.5	18.1	0.0128	750	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	22.5	12.1	0.0112	840	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.25	1.8	24.0	7.41	0.0093	1010	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	28.5	4.61	0.0092	1500	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.8	30.5	3.08	0.0078	1800	500/D
10	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	21.0	36.0	0.0162	680	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	22.0	24.5	0.0142	740	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	23.0	18.1	0.0128	810	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	24.0	12.1	0.0112	910	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	26.5	7.41	0.0093	1240	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	30.5	4.61	0.0092	1620	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.9	33.0	3.08	0.0078	1980	500/D
11	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	21.5	36.0	0.0162	710	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	22.5	24.5	0.0142	790	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	23.5	18.1	0.0128	850	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	24.5	12.1	0.0112	960	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	27.0	7.41	0.0093	1310	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	31.0	4.61	0.0092	1750	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.9	33.5	3.08	0.0078	2130	500/D

12	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	21.5	36.0	0.0162	720	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	22.5	24.5	0.0142	800	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	23.5	18.1	0.0128	860	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.25	1.8	24.5	12.1	0.0112	980	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	27.0	7.41	0.0093	1330	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	31.0	4.61	0.0092	1780	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.9	33.5	3.08	0.0078	2190	500/D
13	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	22.5	36.0	0.0162	760	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	23.5	24.5	0.0142	840	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	24.0	18.1	0.0128	920	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	26.0	12.1	0.0112	1190	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	28.0	7.41	0.0093	1430	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	32.5	4.61	0.0092	1910	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.9	35.0	3.08	0.0078	2350	500/D
14	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	22.5	36.0	0.0162	770	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	23.5	24.5	0.0142	850	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	24.0	18.1	0.0128	930	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	26.0	12.1	0.0112	1200	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	28.0	7.41	0.0093	1450	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.8	32.5	4.61	0.0092	1950	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	1.9	35.0	3.08	0.0078	2400	500/D
15	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	23.0	36.0	0.0162	820	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	24.0	24.5	0.0142	920	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	25.0	18.1	0.0128	1000	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	27.0	12.1	0.0112	1280	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	29.0	7.41	0.0093	1560	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.9	34.0	4.61	0.0092	2120	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	2.0	37.0	3.08	0.0078	2600	500/D
16	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	23.0	36.0	0.0162	830	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	24.0	24.5	0.0142	930	500/D
	1	7/0.43	1.29	0.8	1.0	1.25	1.8	25.0	18.1	0.0128	1010	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	27.0	12.1	0.0112	1300	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	29.0	7.41	0.0093	1580	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.9	34.0	4.61	0.0092	2160	500/D
	6	7/1.04	3.12	1.0	1.0	1.6	2.0	37.0	3.08	0.0078	2660	500/D
17	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	24.0	36.0	0.0162	880	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	25.0	24.5	0.0142	980	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	26.5	18.1	0.0128	1220	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	28.0	12.1	0.0112	1390	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	30.0	7.41	0.0093	1690	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.9	35.5	4.61	0.0092	2320	500/D
	6	7/1.04	3.12	1.0	1.0	2.0	2.0	39.5	3.08	0.0078	3120	500/D
18	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	24.0	36.0	0.0162	890	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	25.0	24.5	0.0142	990	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	26.5	18.1	0.0128	1230	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	28.0	12.1	0.0112	1400	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	30.0	7.41	0.0093	1700	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.9	35.5	4.61	0.0092	2350	500/D
	6	7/1.04	3.12	1.0	1.0	2.0	2.0	39.5	3.08	0.0078	3170	500/D
19	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	24.0	36.0	0.0162	900	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.25	1.8	25.0	24.5	0.0142	1000	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	26.5	18.1	0.0128	1240	500/D

	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	28.0	12.1	0.0112	1410	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	30.0	7.41	0.0093	1730	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	1.9	35.5	4.61	0.0092	2390	500/D
	6	7/1.04	3.12	1.0	1.0	2.0	2.0	39.5	3.08	0.0078	3220	500/D
20	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	25.0	36.0	0.0162	940	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	26.5	24.5	0.0142	1200	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	27.5	18.1	0.0128	1310	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	29.0	12.1	0.0112	1500	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	31.5	7.41	0.0093	1860	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	2.0	37.0	4.61	0.0092	2570	500/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.1	41.5	3.08	0.0078	3500	400/D
21	0.5	7/0.30	0.90	0.8	1.0	1.25	1.8	25.0	36.0	0.0162	950	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	26.5	24.5	0.0142	1210	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	27.5	18.1	0.0128	1320	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	29.0	12.1	0.0112	1510	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.8	31.5	7.41	0.0093	1870	500/D
	4	7/0.85	2.55	1.0	1.0	1.6	2.0	37.0	4.61	0.0092	2590	500/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.1	41.5	3.08	0.0078	3540	400/D
22	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	26.5	36.0	0.0162	1150	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	27.5	24.5	0.0142	1280	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	28.5	18.1	0.0128	1400	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	30.0	12.1	0.0112	1600	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	33.0	7.41	0.0093	2000	500/D
	4	7/0.85	2.55	1.0	1.0	2.0	2.1	39.5	4.61	0.0092	3040	500/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.2	43.5	3.08	0.0078	3810	400/D
23	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	26.5	36.0	0.0162	1160	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	27.5	24.5	0.0142	1290	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	28.5	18.1	0.0128	1420	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	30.0	12.1	0.0112	1620	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	33.0	7.41	0.0093	2030	500/D
	4	7/0.85	2.55	1.0	1.0	2.0	2.1	39.5	4.61	0.0092	3080	500/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.2	43.5	3.08	0.0078	3870	400/D
24	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	27.5	36.0	0.0162	1210	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	28.5	24.5	0.0142	1340	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	29.5	18.1	0.0128	1470	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	31.5	12.1	0.0112	1680	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	34.5	7.41	0.0093	2110	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.1	42.0	4.61	0.0092	3260	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.2	45.5	3.08	0.0078	4010	400/D
25	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.0	36.0	0.0162	1250	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	29.0	24.5	0.0142	1390	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	30.0	18.1	0.0128	1530	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	32.0	12.1	0.0112	1760	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	35.0	7.41	0.0093	2200	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.1	43.0	4.61	0.0092	3400	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.2	46.5	3.08	0.0078	4220	400/D
26	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.0	36.0	0.0162	1260	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	29.0	24.5	0.0142	1400	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	30.0	18.1	0.0128	1540	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	32.0	12.1	0.0112	1780	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	35.0	7.41	0.0093	2220	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.1	43.0	4.61	0.0092	3440	400/D

	6	7/1.04	3.12	1.0	1.2	2.0	2.2	46.5	3.08	0.0078	4270	400/D
27	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.0	36.0	0.0162	1270	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	29.0	24.5	0.0142	1410	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	30.0	18.1	0.0128	1550	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	32.0	12.1	0.0112	1790	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	35.0	7.41	0.0093	2240	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.1	43.0	4.61	0.0092	3470	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.2	46.5	3.08	0.0078	4320	4400/D
28	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.5	36.0	0.0162	1310	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	30.0	24.5	0.0142	1480	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	31.0	18.1	0.0128	1630	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.8	33.0	12.1	0.0112	1880	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	36.0	7.41	0.0093	2350	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.2	44.5	4.61	0.0092	3670	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.3	48.0	3.08	0.0078	4550	400/D
29	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.5	36.0	0.0162	1320	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	30.0	24.5	0.0142	1490	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	31.0	18.1	0.0128	1640	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.9	33.0	12.1	0.0112	1900	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	36.0	7.41	0.0093	2370	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.2	44.5	4.61	0.0092	3700	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.3	48.0	3.08	0.0078	4600	400/D
30	0.5	7/0.30	0.90	0.8	1.0	1.6	1.8	28.5	36.0	0.0162	1330	500/D
	0.75	7/0.37	1.11	0.8	1.0	1.6	1.8	30.0	24.5	0.0142	1500	500/D
	1	7/0.43	1.29	0.8	1.0	1.6	1.8	31.0	18.1	0.0128	1650	500/D
	1.5	7/0.52	1.56	0.8	1.0	1.6	1.9	33.0	12.1	0.0112	1910	500/D
	2.5	7/0.67	2.01	0.8	1.0	1.6	1.9	36.0	7.41	0.0093	2400	500/D
	4	7/0.85	2.55	1.0	1.2	2.0	2.2	44.5	4.61	0.0092	3740	400/D
	6	7/1.04	3.12	1.0	1.2	2.0	2.3	48.0	3.08	0.0078	4660	400/D

The table of 0.6/1 KV CVVSWA shown concentric stranded conductor only
If you want to have solid or flexible conductor type, please contact with our Sales Department.