


300 V 70°C VSF

TIS 11-2531 TABLE 10 (1 CORE)

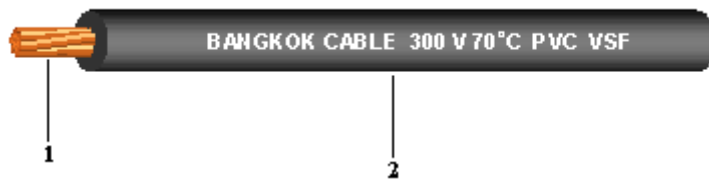

Construction :

1. Conductor : Bunch stranded annealed copper wires
2. Insulation : Polyvinyl chloride (PVC) (any color as requested)

Application :

For marking cores connection between terminals inside appliances, instruments or apparatus.

Conductor		Thickness of insulation mm	Overall diameter mm	Current rating in air A	Minimum insulation resistance (at 70°C) Mohm-km	Cable weight (Approx.) kg/km	Standard Length m
Nominal cross-sectional area sq.mm	No. & dia. of wires No./mm						
0.5	16/0.20	0.8	3.2	10	0.0160	12	100/C
0.5	28/0.15	0.8	3.2	10	0.0160	12	100/C
0.75	24/0.20	0.8	3.4	12	0.0140	15	100/C
0.75	42/0.15	0.8	3.4	12	0.0140	15	100/C
1	32/0.20	0.8	3.6	16	0.0127	18	100/C
1.5	30/0.25	0.8	3.9	19	0.0111	23	100/C
2.5	50/0.25	0.8	4.8	26	0.0092	35	100/C