


Lead free low voltage wire for automobile

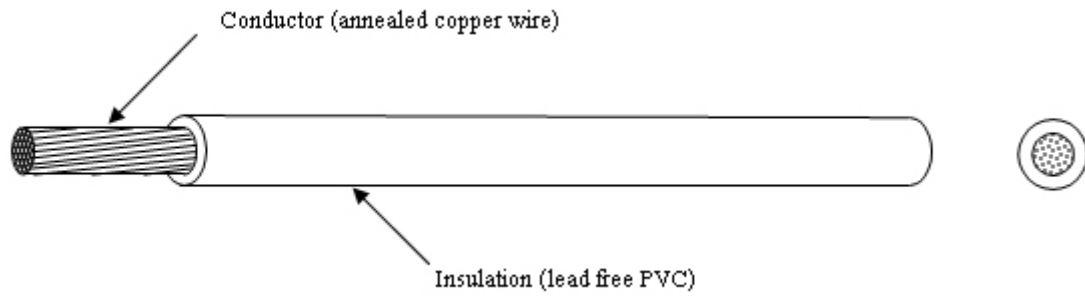

Description AV-LF

Rating

Standard

Construction :

Marking

Conductor			Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20 °C) Maximum (ohm/km)	Mass Approx. (kg/km)	Standard Length (m/coil)
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm)					
0.5f	20/0.18	1.0	0.6	2.2	36.7	8	450
0.5	7/0.32	1.0	0.6	2.2	32.7	9	450
0.75f	30/0.18	1.2	0.6	2.4	24.4	12	450
0.85	11/0.32	1.2	0.6	2.4	20.8	12	450
1.25f	50/0.18	1.5	0.6	2.7	14.7	17	300
1.25	16/0.32	1.5	0.6	2.7	14.3	17	300
2	26/0.32	1.9	0.6	3.1	8.81	25	300
3	41/0.32	2.4	0.7	3.8	5.59	39	300

- Note :**
1. BCC specification No. : ELA 021/0108
 2. "f" means flexible conductor