


**Lead free low tension wire with thin wall insulation for automobiles**

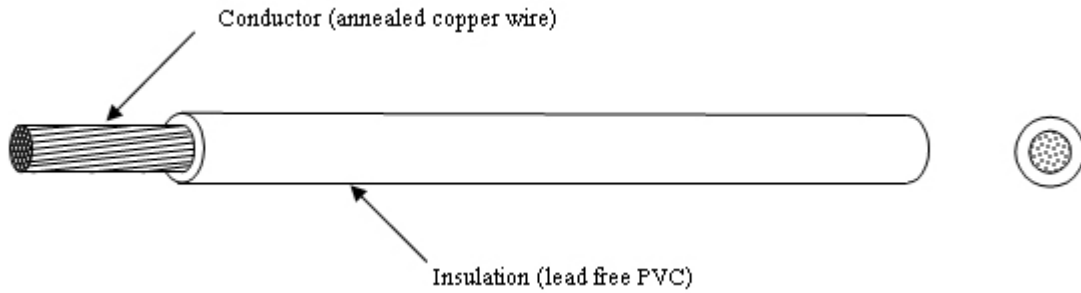

**Description** AVS-LF

**Rating**

**Standard**

**Construction :**

**Marking**

Conductor			Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20°C) Maximum (ohm/km)	Mass Approx. (kg/km)	Standard Length (m/coil)
Nominal sectional area (mm <sup>2</sup> )	Construction (No./mm)	Diameter Approx. (mm)					
0.3	7/0.26	0.8	0.50	1.8	50.2	6.3	500
0.3f	15/0.18	0.8	0.50	1.8	48.9	6.4	500
0.5	7/0.32	1.0	0.50	2.0	32.7	8.5	500
0.5f	20/0.18	1.0	0.50	2.0	36.7	7.9	500
0.75f	30/0.18	1.2	0.50	2.2	24.4	10.6	500
0.85	16/0.26	1.2	0.50	2.2	22.0	11.6	500
	11/0.32	1.2	0.50	2.2	20.8	12.1	500
1.25	16/0.32	1.5	0.50	2.5	14.3	16.3	300
1.25f	50/0.18	1.5	0.50	2.5	14.7	16.0	300
2	26/0.32	1.9	0.50	2.9	8.81	24.6	300
2f	37/0.26	1.8	0.50	2.9	9.50	23.2	300
3	41/0.32	2.4	0.60	3.6	5.59	38.2	300

- Note :**
1. BCC specification No. : ELA 022/0108
  2. "f" means flexible conductor