


### Coaxial Cable

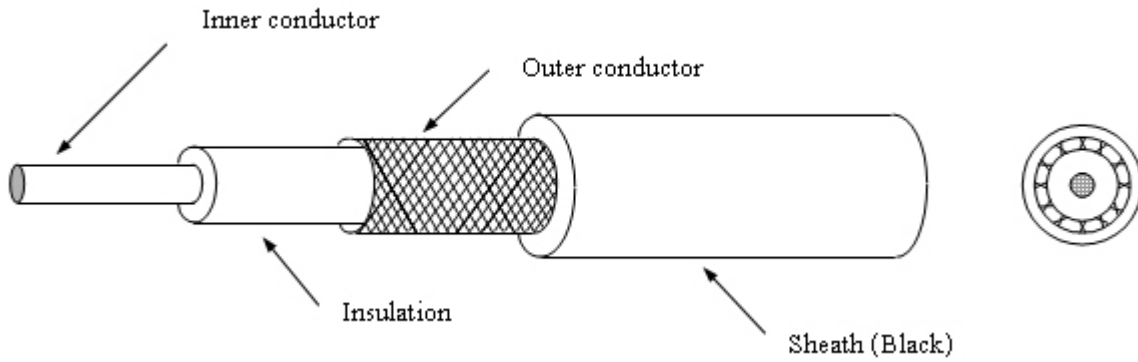

**Description** : COAXIAL CABLE  
**Rating** :  
**Standard** : JIS C 3501  
**Construction** :  
**Marking** :

**Inner conductor** : Annealed copper conductor (solid or strand)  
**Insulation** : Polyethylene  
**Outer conductor** : Annealed copper (single braid)  
**Sheath** : Polyvinyl Chloride (Black)

Symbol	Inner conductor		Insulation		Outer conductor		Sheath		Impedance	Capacitance 1 kHz	Attenuation 10 MHz	Standard length (m/coil)
	Construction	Diameter	Thickness	Diameter	Construction	Diameter	Thickness	Overall diameter				
	(No./mm)	Approx. (mm)	Nominal (mm)	Approx. (mm)		Approx. (mm)	Nominal (mm)	Approx. (mm)				
1.5D-2V	7/0.18	0.54	0.53	1.6	0.10/5/16	2.1	0.4	2.9	50	104	85	200
2.5D-2V	1/0.8	0.8	0.95	2.7	0.12/7/16	3.3	0.5	4.3	50	100	45	200
3D-2V	7/0.32	0.96	1.02	3.0	0.14/5/24	3.7	0.8	5.3	50	100	47	200
1.5C-2V	1/0.26	0.26	0.67	1.6	0.10/5/16	2.1	0.4	2.9	75	69	96	200
2.5C-2V	1/0.4	0.4	1	2.4	0.12/6/16	3.0	0.5	4.0	75	69	52	200
3C-2V	1/0.5	0.5	1.3	3.1	0.14/5/24	3.8	0.8	5.4	75	67	42	200
5C-2V	1/0.8	0.8	2.05	4.9	0.14/7/24	5.6	0.9	7.4	75	67	27	100

**Note :** 1. BCC specification No. : ELA 020/0108