


Heat-resistant Lead Free PVC Insulated Wire for Electrical Apparatus (HKIV-LF)

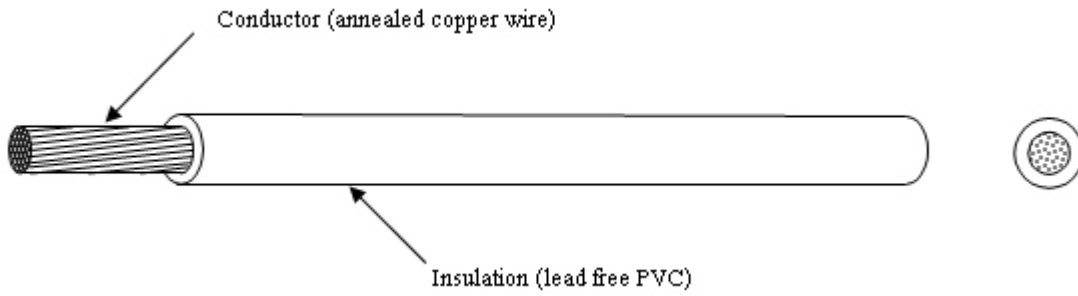

Description HKIV-LF
Rating 75°C, 300V
Standard
Construction :
Marking BANGKOK CABLE & 1TD HKIV *.* mm² LF

Conductor			Insulation thickness	Overall diameter	Conductor resistance (at 20°C)	Mass	Standard Length
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm0)					
0.75	30/0.18	1.1	0.8	2.7	24.4	14	300
1.25	50/0.18	1.5	0.8	3.1	14.7	20	300
2.0	37/0.26	1.8	0.8	3.4	9.5	28	300
3.5	45/0.32	2.5	0.8	4.1	5.09	46	300

Note :
 1. BCC specification No. : ELA 019/0108
 2. *.* : Size of conductor