


Heat-resistant Lead Free PVC Insulated Cabtyre Round Cord (HVCTF-LF)

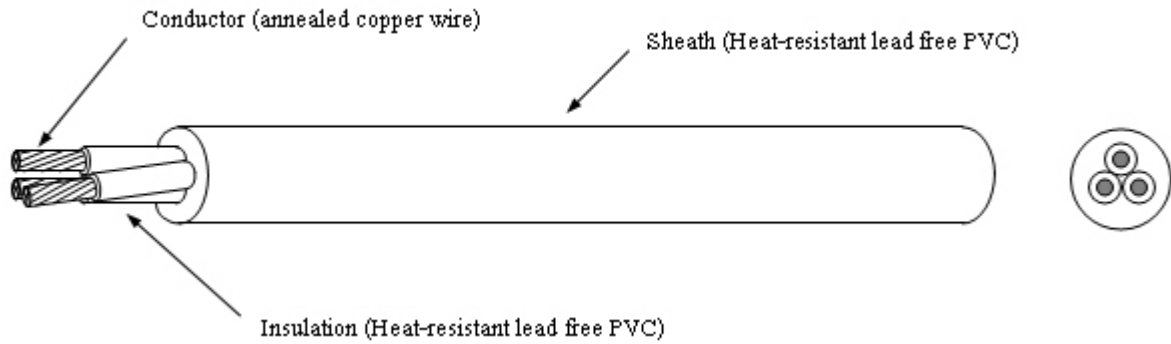

Description HVCTF-LF

Rating 75°C, 300V

Standard

Construction :

Marking BANGKOK CABLE & 1TD HVCTF ☆☆☆X *.* mm² LF

Number of cores	Conductor			Insulation thickness	Sheath Thickness	Overall diameter	Conductor resistance (at 20° C)	Mass	Standard Length
	Nominal sectional area (mm ²)	Construction (No./mm)	Diameter						
			Approx. (mm0)	Nominal (mm)	Nominal (mm)	Approx. (mm)	Maximum (ohm/km)	Approx. (kg/km)	(m/coil)
2	0.75	30/0.18	1.1	0.6	1.0	6.6	25.1	60	100
	1.25	50/0.18	1.5	0.6	1.0	7.4	15.1	80	100
	2.0	37/0.26	1.8	0.6	1.0	8.0	9.8	100	100
3	0.75	30/0.18	1.1	0.6	1.0	7.0	25.1	70	100
	1.25	50/0.18	1.5	0.6	1.0	7.8	15.1	95	100
	2.0	37/0.26	1.8	0.6	1.0	8.5	9.8	120	100
4	0.75	30/0.18	1.1	0.6	1.0	7.6	25.1	90	100
	1.25	50/0.18	1.5	0.6	1.0	8.5	15.1	120	100
	2.0	37/0.26	1.8	0.6	1.0	9.3	9.8	150	100

- Note :**
1. BCC specification No. : ELA 017/0108
 2. ☆☆☆: Number of pairs
 3. *.*: Size of conductor