


Heat-resistant Lead Free PVC Insulated Cabtyre Oval Cord (HVCTFK-LF)

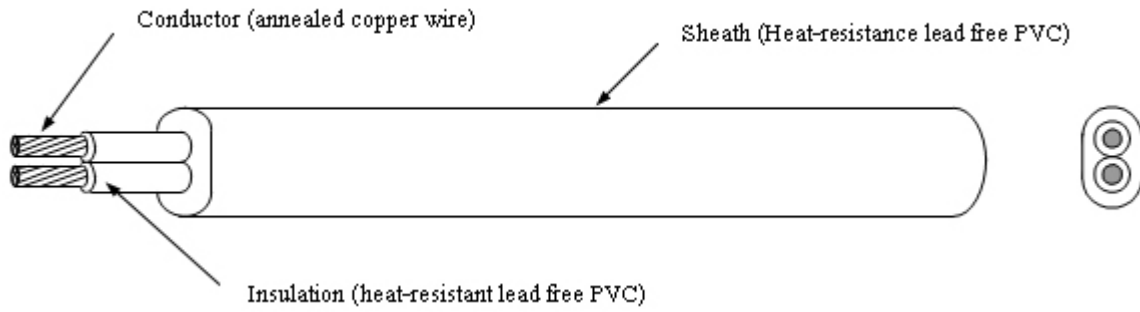

Description HVCTFK-LF

Rating 75°C, 300V

Standard

Construction :

Marking BANGKOK CABLE &1TD HVCTFK *.* mm² LF

Conductor			Insulation thickness	Sheath Thickness	Overall diameter	Conductor resistance (at 20° C) Maximum	Mass Approx.	Standard Length
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm0)						
0.75	30/0.18	1.1	0.6	1.0	4.3 x 6.6	24.4	45	100
1.25	50/0.18	1.5	0.6	1.0	4.7 x 7.4	14.7	55	100
2.0	37/0.26	1.8	0.6	1.0	6.0 x 8.0	9.5	75	100

- Note :**
1. BCC specification No. : ELA 016/0108
 2. *.* : Size of conductor