


Heat-resistant Lead Free PVC Insulated Flat Cord (HVFF-LF)

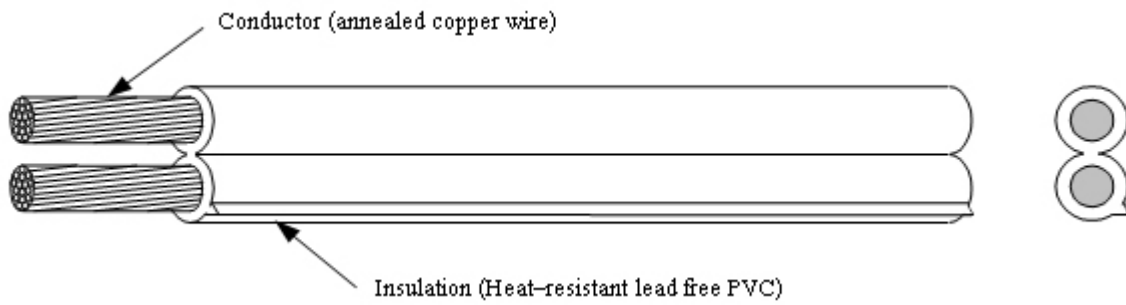

Description HVFF-LF
Rating 75°C, 300V
Standard
Construction :
Marking BANGKOK CABLE &1TD HVFF *.* mm² LF

Conductor			Insulation thickness	Overall diameter	Conductor resistance (at 20° C)	Mass	Standard Length
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm0)					
0.5	20/0.18	0.93	0.8	2.5 x 5.0	36.7	22	100
0.75	30/0.18	1.14	0.8	2.7 x 5.4	24.4	28	100
1.25	50/0.18	1.47	0.8	3.1 x 6.2	14.7	40	100
2.0	37/0.26	1.83	0.8	3.4 x 6.8	9.5	55	100

Note :

1. BCC specification No. : ELA 015/0108
2. *.* : Size of conductor