


Lead Free PVC Insulated Wire (IV-LF)

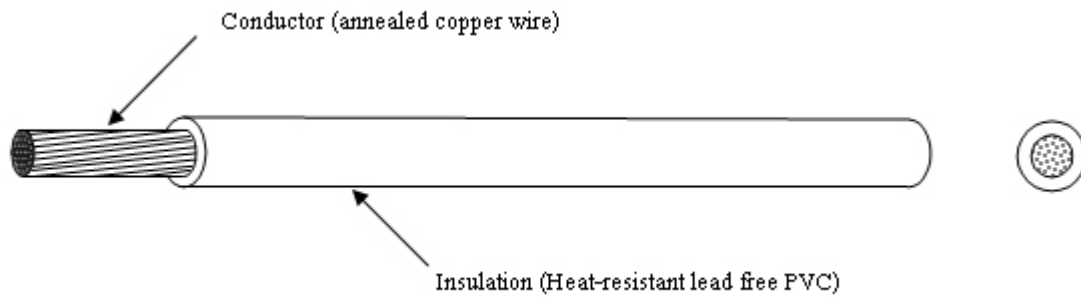

Description IV-LF
Rating 60°C, 300V
Standard
Construction :
Marking BANGKOK CABLE IV *.* mm² LF

Conductor			Insulation thickness	Overall diameter	Conductor resistance (at 20°C)	Mass	Standard Length
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm0)					
0.9	7/0.4	1.2	0.8	2.8	20.9	16	300
1.25	7/0.45	1.35	0.8	3.0	16.5	19	300
2.0	7/0.6	1.8	0.8	3.4	9.24	28	300
3.5	7/0.8	2.4	0.8	4.0	5.20	45	300

Note :

1. BCC specification No. : ELA 018/0108
2. *.* : Size of conductor