


Lead Free PVC Insulated Wire for Electrical Apparatus (KIV-LF)

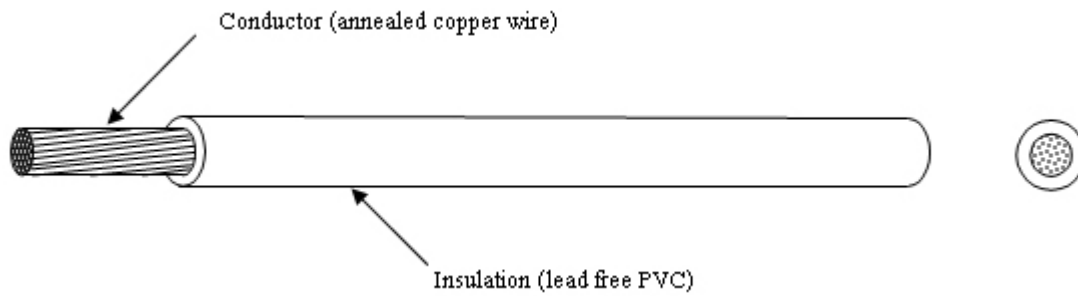

Description KIV-LF

Rating 60°C, 300V

Standard

Construction :

Marking BANGKOK CABLE KIV *.* mm² LF

Conductor			Insulation thickness	Overall diameter	Conductor resistance (at 20° C)	Mass	Standard Length
Nominal sectional area (mm ²)	Construction (No./mm)	Diameter Approx. (mm0)					
0.75	30/0.18	1.1	0.8	2.7	24.4	14	300
1.25	50/0.18	1.5	0.8	3.1	14.7	20	300
2.0	37/0.26	1.8	0.8	3.4	9.5	28	300
3.5	45/0.32	2.5	0.8	4.1	5.09	46	300

- Note :**
1. BCC specification No. : ELA 019/0108
 2. *.* : Size of conductor