


### Heat-resistant Lead Free PVC Insulated Single Core Cord (S-HVSF-LF)

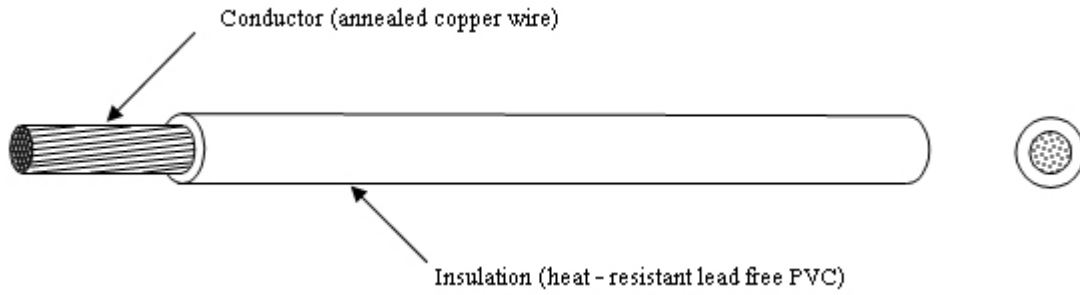

**Description** S-HVSF-LF  
**Rating** 105°C, 300V  
**Standard**  
**Construction** :  
**Remark** Special heat-resistant  
**Marking** S-HVSF-LF : BANGKOK CABLE &1TD S-HVSF \*.\* mm<sup>2</sup> LF

Conductor			Insulation thickness	Overall diameter	Conductor resistance (at 20°C)	Mass	Standard Length
Nominal sectional area (mm <sup>2</sup> )	Construction (No./mm)	Diameter Approx. (mm0)					
0.5	20/0.18	0.93	Nominal (mm)	Approx. (mm)	Maximum (W /km)	Approx. (kg/km)	(m/coil)
0.5	20/0.18	0.93	0.8	2.5	36.7	11	450
0.75	30/0.18	1.14	0.8	2.7	24.4	14	450
1.25	50/0.18	1.47	0.8	3.1	14.7	20	300
2.0	37/0.26	1.83	0.8	3.4	9.5	27	300
3.5	45/0.32	2.48	0.8	4.1	5.1	45	300

**Note :**

1. BCC specification for S-HVSF-LF No. : ELA 025/0108
2. \*.\* : Size of conductor