


PVC Self - Supported Telephone Drop Wire (DW)

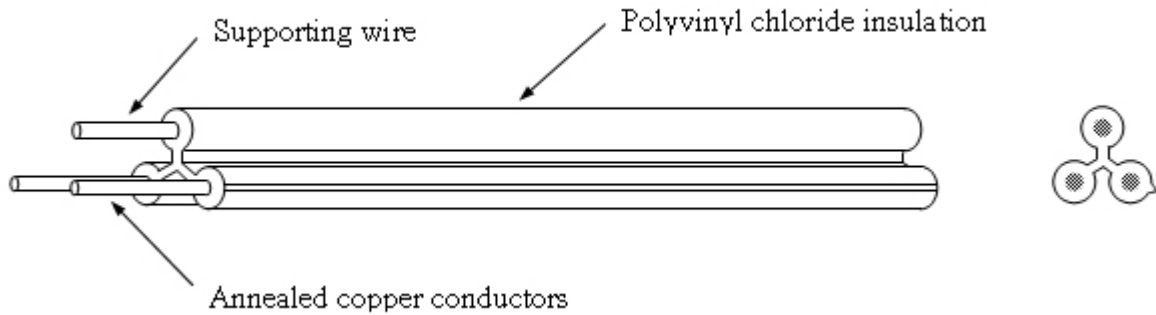

Description	DW
Rating	
Standard	
Construction	:
Marking	BANGKOK CABLE ☆☆☆☆S-S DROP WIRE *.* X 2 C
Conductor	Plain annealed copper , solid
Support	Galvanized steel, solid
Insulation	Polyvinyl chloride (Black)

Number of cores (C)	Conductor Diameter (mm)	Insulation Thickness Nominal (mm)	Diameter of support wire Nominal (mm)	Overall Diameter Apprex. (mm)	Mass Approx. (kg/km)	Standard Length (m/coil)
2	0.65	1.0	1.2	6.1 ~ 7.3	45	200
2	0.9	1.15	1.2	6.8 ~ 8.1	56	200

- Note :**
1. BCC Specification No. : TEA 004/0208
 2. ☆☆☆☆: Year of manufacture
 3. *.* : Diameter of conductor