


PVC Insulation Jumper Wire (JW)

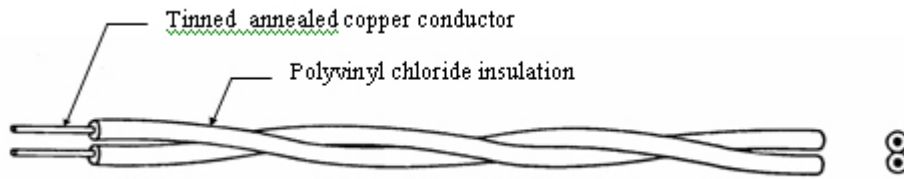

Description	JW
Rating	
Standard	
Construction	:
Marking	
Conductor	Tinned annealed copper, solid
Insulation	Polyvinyl chloride
Lay-up	The require number of insulated conductors twisted together
Identification	0.5 mm gauge, Black and Yellow 0.65 mm gauge, Red and White or others, upon request

Conductor diameter (mm)	Number of cores (C)	Insulation thickness Nominal (mm)	Sheath thickness Nominal (mm)	Overall diameter Approx. (mm)	Mass Approx. (kg/km)	Standar dlength (m/coil)
0.5	2	0.3	1.10	2.2	5.6	200
0.65	2	0.3	1.25	2.5	8.4	200

Note : BCC Specification No. : TEA 010/0208