


**PVC Sheathed and PVC Insulated Terminating Cable (PVC - PVC)**

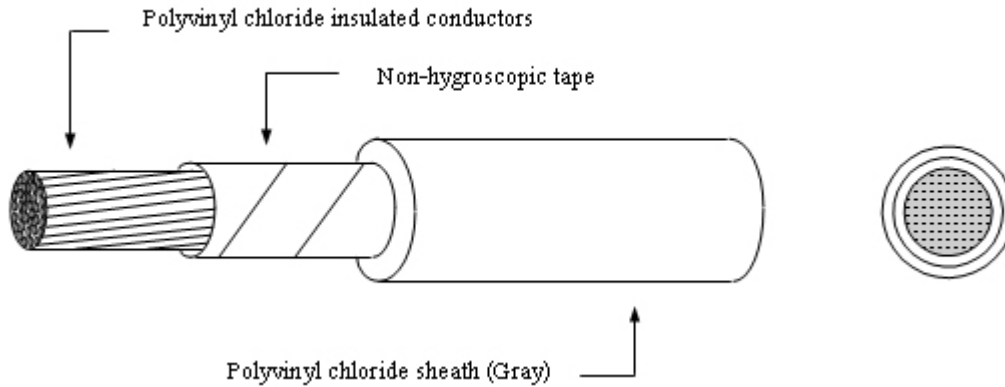

**Reference** TOT Spec. No. OES - 004 - 011 - 01  
**Description** PVC - PVC  
**Rating** :  
**Standard** :  
**Construction** :  
**Marking** BANGKOK CABLE ☆☆☆☆

**Conductor** Tinned annealed copper, solid  
**Insulation** Polyvinyl chloride  
**Pairs** Two insulated conductors twisted  
**Lay-up** Unit construction for cable more than 25 pairs.  
 Concentric for cable up to 25 pairs.  
**Core-covering** Non-hygroscopic tape  
**Sheath** Polyvinyl chloride (Gray)

Conductor diameter (mm)	Number of pairs (P)	Sheath thickness Nominal (mm)	Overall diameter approx. (mm)	Mass Approx. (kg/km)	Standard length (m)
0.5	100	1.9	26.3	830	500
	200	1.9	35.5	1,520	500
	300	1.9	42.7	2,220	500
	400	1.9	48.4	2,870	500
0.65	100	1.9	29.5	1,130	500
	200	1.9	40.0	2,110	500
	300	1.9	48.0	3,075	500
	400	1.9	54.8	4,020	500

**Note :**  
 1. BCC Specification No. : TEA 011/0208  
 2. ☆☆☆☆: Year of manufacture