


Inside - Outside Station Wire (SW)

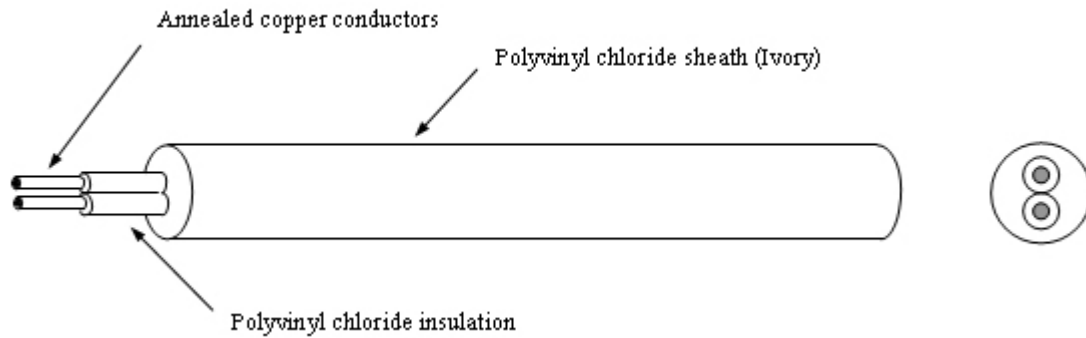

Description	SW
Rating	
Standard	
Construction	:
Marking	BANGKOK CABLE SW *.* X ☆☆☆C
Conductor	Plain annealed copper , solid
Insulation	Polyethylene
Identification	2 cores : Red and Green 3 cores : Red, Green, and Yellow 4 cores : Red, Green, Yellow and Black 5 cores : Red, Green, Yellow, Black and White 6 cores : Red, Green, Yellow, Black, White and Brown
Sheath	Polyvinyl chloride (Ivory)

Conductor diameter (mm)	Number of cores (C)	Insulation thickness Nominal (mm)	Sheath thickness Nominal (mm)	Overall diameter Approx. (mm)	Mass Approx. (kg/km)	Standard length (m/coil)
0.5	2	0.19	0.38	2.8	11	150
	3	0.19	0.38	2.9	13	150
	4	0.19	0.38	3.1	15	150
	5	0.19	0.38	3.4	17	150
	6	0.19	0.38	3.7	20	150
0.65	2	0.24	0.38	3.2	16	150
	3	0.24	0.38	3.4	18	150
	4	0.24	0.38	3.7	21	150
	5	0.24	0.38	4.0	25	150
	6	0.24	0.38	4.4	29	150

- Note :**
1. BCC Specification No. : TEA 009/0208
 2. *.* : Diameter of conductor
 3. ☆☆☆ : Number of pairs