


**PVC Insulated, PVC Sheathed Switchboard Cable (SWVP)**

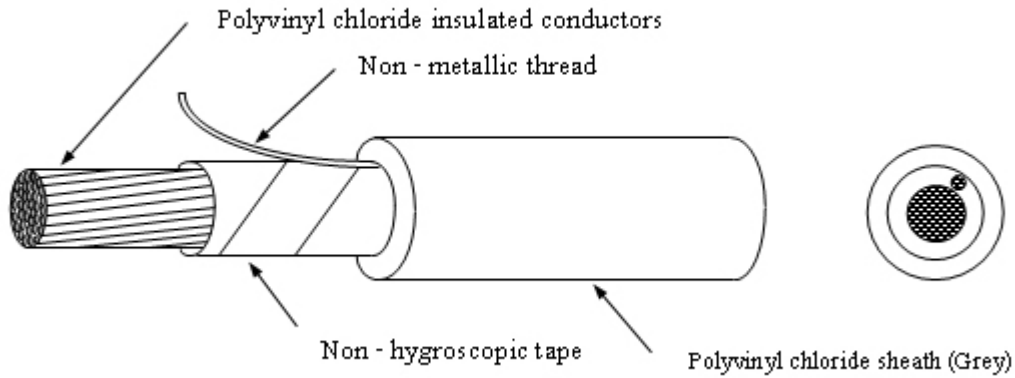

**Description** : SWVP  
**Rating** :  
**Standard** :  
**Construction** :  
**Marking** : BANGKOK CABLE ☆☆☆☆☆

**Conductor** : Tinned annealed copper, solid  
**Insulation** : Heat-resistant PVC  
**Pairs** : Two insulated conductors twisted  
**Lay-up** : The elements laid up to form a compact and circular cable.  
**Core-covering** : Non-hygroscopic tape  
**Rip-cord** : Non-metallic thread  
**Sheath** : Polyvinyl chloride (Gray)

Conductor diameter (mm)	Number of pairs (P)	Insulation Thickness Nominal (mm)	Sheath thickness Nominal (mm)	Overall diameter Approx. (mm)	Mass Approx. (kg/km)	Standard length (m)
0.4	6	0.2	0.7	4.7	25	1,000
	12	0.2	0.7	5.9	40	1,000
	24	0.2	0.7	7.0	64	1,000
	32	0.2	0.7	7.8	81	1,000
	48	0.2	0.7	9.1	112	1,000
	64	0.2	0.7	10.3	143	1,000
0.5	6	0.2	0.7	5.1	31	1,000
	12	0.2	0.7	6.4	51	1,000
	32	0.2	0.7	8.7	121	1,000
	64	0.2	0.7	11.6	222	1,000

**Note :** 1. BCC Specification No. : TEA 003/1207  
 2. ☆☆☆☆☆: Year of manufacture