


## Lead Free PVC Insulated Wire (UL 1007-LF) UL, CSA Approved PVC Wire

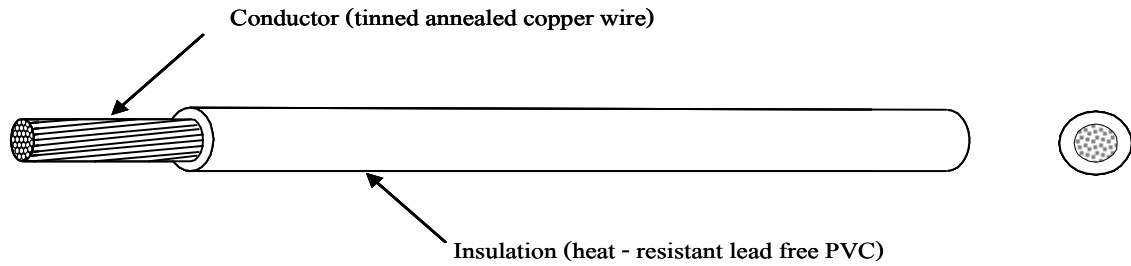

**Description** UL 1007-LF (CSA TR-64)  
**Rating** 80 °C, 300V (UL) / 90 °C, 600V peak (CSA)  
**Standard** UL Subject 758, CSA C22.2 No.127  
**Construction**  
**Marking** AWM E106028 STYLE 1007 LF \*\* AWG VW-1 BANGKOK CABLE -F-  
 CSA LL68482 TYPE TR-64 90C FT1

Size (AWG)	Conductor		Insulation thickness  Nominal (mm)	Overall diameter  Approx. (mm)	Conductor resistance (at 20°C)	Mass  Approx. (kg/km)	Standard length	
	Construction (No./mm)	Diameter  Approx. (mm)					Coil  (m)	Bobbin  (m)
28	7/0.127	0.38	0.41	1.20	223.0	2.2	610	3,050
26	7/0.16	0.48	0.41	1.30	139.0	2.9	610	3,050
24	11/0.16	0.61	0.41	1.43	89.8	3.8	610	2,440
22	17/0.16	0.76	0.41	1.58	58.1	5.2	610	2,135
20	26/0.16	0.94	0.41	1.76	38.3	7.2	610	-
18	43/0.16	1.21	0.41	2.03	23.4	10.7	305	-
16	54/0.18	1.53	0.41	2.35	14.6	16.0	305	-

- Note :**
1. Standard for safety File No. : UL : E106028, CSA : LL68482
  2. BCC specification No. : ELA 001/0108
  3. \*\* : Size of conductor