


Lead Free PVC Insulated Wire (UL 1015-LF) UL, CSA Approved PVC Wire

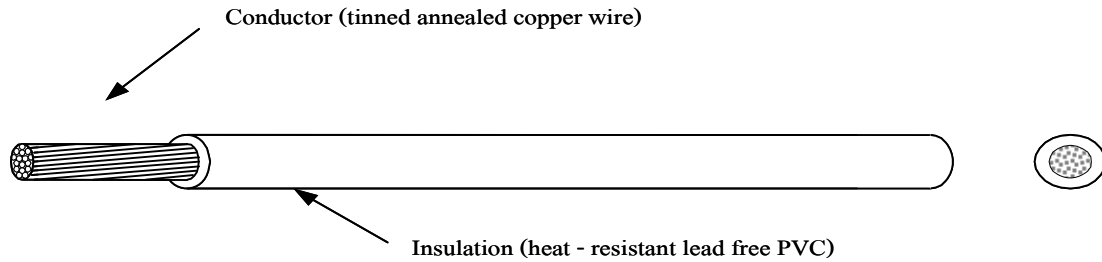

Description UL 1015-LF (CSA TEW)

Rating 105 °C, 600V

Standard UL Subject 758 , CSA C22.2 No.127

Construction

Marking AWM E106028 STYLE 1015 LF ** AWG 105C VW-1 BANGKOK CABLE –F–
CSA LL68483 TYPE TEW 105C 600V FT1

For 26 AWG AWM E106028 STYLE 1015 LF ** AWG 105C VW-1 BANGKOK CABLE
CSA LL68483 TYPE TEW 105C 600V FT1

Size (AWG)	Conductor		Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20°C)	Mass Approx. (kg/km)	Standard length	
	Construction (No./mm)	Diameter Approx. (mm)					Coil (m)	Bobbin (m)
26	7/0.16	0.48	0.81	2.10	139.0	6.0	305	-
24	11/0.16	0.61	0.81	2.23	89.8	7.0	305	915
22	17/0.16	0.76	0.81	2.38	58.1	8.7	305	915
20	26/0.16	0.94	0.81	2.56	38.3	11.0	305	-
18	43/0.16	1.21	0.81	2.83	23.4	15.2	305	-
16	54/0.18	1.53	0.81	3.15	14.6	21.1	305	-
14	41/0.26	1.92	0.81	3.54	9.64	29.5	305	-
12	65/0.26	2.42	0.81	4.04	6.06	42.7	305	-
10	104/0.26	3.04	0.81	4.66	3.80	63.5	305	-

- Note :**
1. Standard for safety File No. : UL : E106028, CSA : LL68483
 2. BCC specification No. : ELA 002/0108
 3. ** : Size of conductor