


Lead Free PVC Insulated Wire (UL 1061-LF) UL , CSA Approved PVC Wire

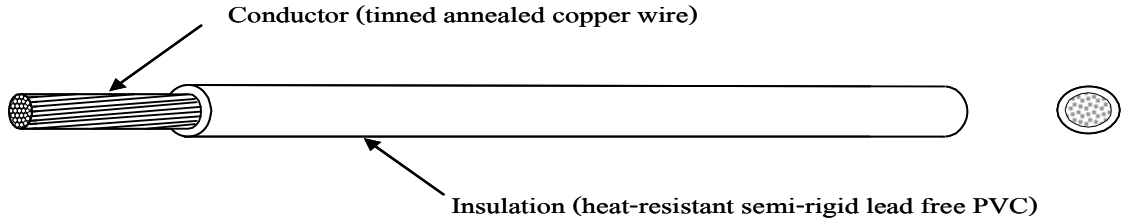

Description UL 1061-LF (CSA AWM Class I Group A/B)

Rating 80 °C , 300V

Standard UL Subject 758 , CSA C22.2 No.210.2

Construction

Marking AWM E106028 STYLE 1061 LF**AWG VW-1 BANGKOK CABLE -F-
CSA LL93566 I A/B 80C 300V FT1

Size (AWG)	Conductor		Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20-C) Maximum (ohm/km)	Mass Approx. (kg/km)	Standard length	
	Construction (No./mm)	Diameter Approx. (mm)					Coil (m)	Bobbin (m)
30	7/0.102	0.31	0.25	0.81	354.0	1.2	915	6,100
28	7/0.127	0.38	0.25	0.88	223.0	1.6	915	6,100
26	7/0.16	0.48	0.25	0.98	139.0	2.2	915	6,100
24	11/0.16	0.61	0.25	1.11	89.8	3.0	915	4,800
22	17/0.16	0.76	0.25	1.26	58.1	4.3	915	-
20	26/0.16	0.94	0.25	1.44	38.3	6.3	915	-
18	43/0.16	1.21	0.25	1.71	23.4	9.3	610	-

- Note :**
1. Standard for safety File No. : UL : E106028, CSA : LL93566
 2. BCC specification No. : ELA 004/0108
 3. ** : Size of conductor