


### Lead Free PVC Insulated Wire (UL 1095-LF) UL approved PVC wire

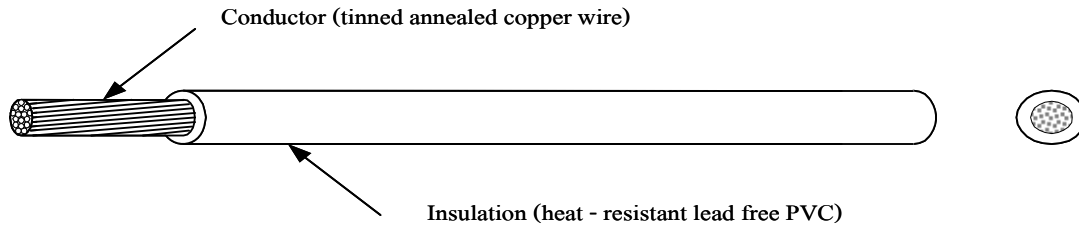


**Description** UL 1095-LF

**Rating** 80 °C , 300V

**Standard** UL Subject 758

**Construction**

**Marking**  AWM E106028 STYLE 1095 LF \*\* AWG VW-1 BANGKOK CABLE -F-

Size (AWG)	Conductor		Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20°C)	Mass Approx. (kg/km)	Standard Length (m/coil)
	Construction (No./mm)	Diameter Approx. (mm)					
30	7/0.102	0.31	0.33	0.97	354.0	1.5	915
28	7/0.127	0.38	0.33	1.04	223.0	1.9	915
26	7/0.16	0.48	0.33	1.14	139.0	2.5	915
24	11/0.16	0.61	0.33	1.27	89.8	3.5	915
22	17/0.16	0.76	0.33	1.42	58.1	4.8	915
20	26/0.16	0.94	0.33	1.60	38.3	6.9	915

- Note :**
1. Standard for safety File No. : UL : E106028
  2. BCC specification No. : ELA 005/0108
  3. \*\* : Size of conductor