


Lead Free PVC Double Insulated Wire (UL 1617-LF) UL, cUL Approved PVC Wire

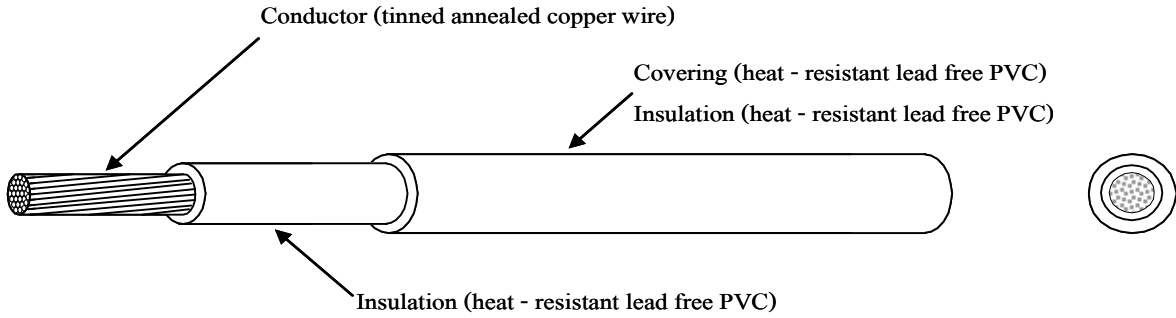

Description UL 1617-LF ((cUL AWM Class I , Group A)

Rating 105°C, 600V

Standard UL Subject 758 , CSA C22.2 No.210.2

Construction

Marking AWM E106028 STYLE 1617 ** AWG 105C 600V VW-1 BANGKOK CABLE
 AWM I A 105C 600V FT1 LF

Size (AWG)	Conductor		Insulation		Covering		Conductor resistance (at 20°C)	Mass Approx. (kg/km)	Standard Length (m/coil)
	Construction (No./mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)			
26	7/0.16	0.48	0.81	2.10	0.48	3.06	139.0	11.3	305
24	11/0.16	0.61	0.81	2.23	0.48	3.19	89.8	12.7	305
22	17/0.16	0.76	0.81	2.38	0.48	3.34	58.1	14.6	305
20	26/0.16	0.94	0.81	2.56	0.48	3.52	38.3	17.4	305
18	43/0.16	1.21	0.81	2.83	0.48	3.79	23.4	21.8	305
16	54/0.18	1.53	0.81	3.15	0.48	4.11	14.6	28.2	153
14	41/0.26	1.92	0.81	3.54	0.48	4.50	9.64	37.7	153
12	65/0.26	2.42	0.81	4.04	0.48	5.00	6.06	52.0	153
10	104/0.26	3.04	0.81	4.66	0.48	5.62	3.80	74.5	153

- Note :**
1. Standard for safety File No. : UL and cUL: E106028
 2. BCC specification No. : ELA 010/0108
 3. ** : Size of conductor