


Lead Free PVC Double Insulated Wire (UL 1618-LF) UL, cUL Approved PVC Wire

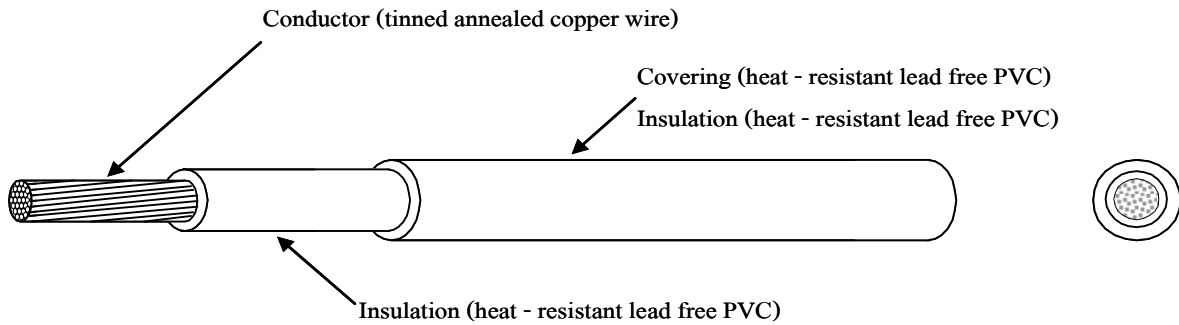

Description UL 1618-LF ((cUL AWM Class I , Group A)

Rating 80°C, 300V

Standard UL Subject 758 , CSA C22.2 No.210.2

Construction

Marking AWM E106028 STYLE 1618 ** AWG 80C 300V VW-1 BANGKOK CABLE
 AWM I A 80C 300V FT1 LF

Size (AWG)	Conductor		Insulation		Covering		Conductor resistance (at 20° C)	Mass Approx. (kg/km)	Standard Length (m/coil)
	Construction (No./mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)			
26	7/0.16	0.48	0.48	1.44	0.48	2.40	139.0	7.6	305
24	11/0.16	0.61	0.48	1.57	0.48	2.53	89.8	8.9	305
22	17/0.16	0.76	0.48	1.72	0.48	2.68	58.1	10.6	305
20	26/0.16	0.94	0.48	1.90	0.48	2.86	38.3	13.1	305
18	43/0.16	1.21	0.48	2.17	0.48	3.13	23.4	17.3	305

- Note :**
1. Standard for safety File No. : UL and cUL: E106028
 2. BCC specification No. : ELA 011/0108
 3. ** : Size of conductor