


## Lead Free PVC Insulated Wire (UL 1865-LF) UL, CSA Approved PVC Wire

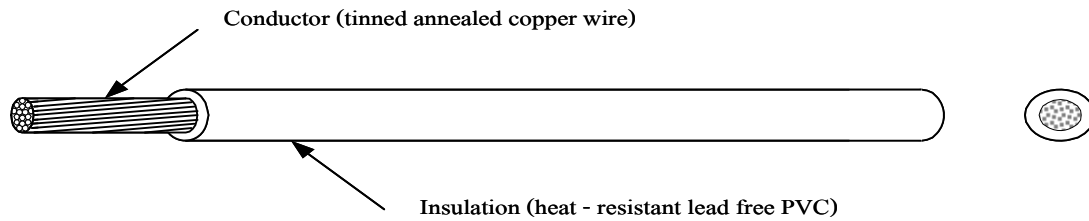

**Description** UL1865-LF (CSA TR-64)

**Rating** 80 °C , 300V (UL) / 90 °C , 600V peak (CSA)

**Standard** UL Subject 758 , CSA C22.2 No. 127

**Construction**

**Marking** AWM E106028 STYLE 1865 LF \*\* AWG VW 1 BANGKOK CABLE –F–  
CSA LL68482 TYPE TR-64 90C FT1

Size (AWG)	Conductor		Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20°C)	Mass Approx. (kg/km)	Standard length Coil (m/coil)
	Construction (No./mm)	Diameter Approx. (mm)					
22	17/0.16	0.76	0.50	1.76	58.1	6.0	610
20	26/0.16	0.94	0.50	1.94	38.3	8.1	610
18	43/0.16	1.21	0.50	2.21	23.4	11.8	305
16	54/0.18	1.53	0.50	2.53	14.6	16.9	305

- Note :**
1. Standard for safety file No. : UL : E106028 , CSA : LL68482
  2. BCC specification No. : ELA 008/0108
  3. \*\* : Size of conductor