


UL approved Lead Free PVC Multi Core Computer Cable with Shield (UL2464-SB-LF)

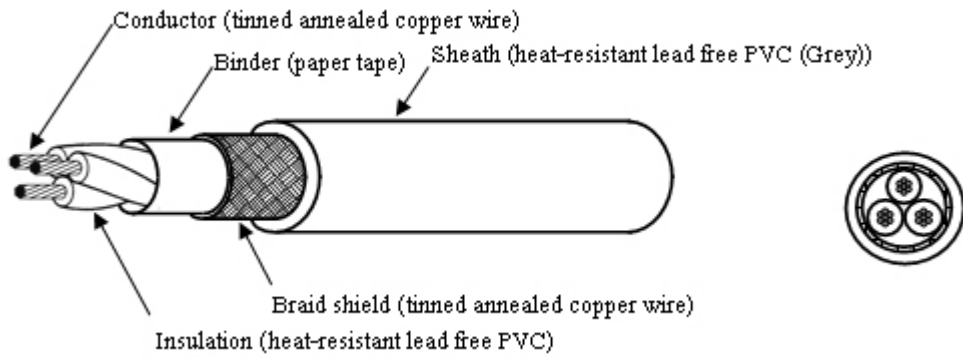

Description UL 2464-SB-LF
Rating 80 °C, 300V
Standard UL Subject 758
Construction :
Marking AWM E106028 STYLE 2464 LF VW-1 BANGKOK CABLE

No. of cores	Conductor		Insulation			Diameter of assembly Approx. (mm)	Shield3		Jacket thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20oC) Maximum (W/km)	Standard Length (m/coil)
	Size (AWG)	Construction (No./mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)		Size (mm)	Coverage Minimum (%)				
2	24	11/0.16	0.61	0.41	1.43	3.0	0.12	80	0.81	5.2	88.0	100
	22	17/0.16	0.76		1.58	3.3				5.5	59.3	
	20	26/0.16	0.94		1.76	3.6				5.8	37.7	
	18	43/0.16	1.21		2.03	4.2				6.4	23.8	
	16	54/0.18	1.53		2.35	4.8				7.0	14.9	
3	24	11/0.16	0.61	0.41	1.43	3.2	0.12	80	0.81	5.4	88.0	100
	22	17/0.16	0.76		1.58	3.5				5.7	59.3	
	20	26/0.16	0.94		1.76	3.9				6.1	37.7	
	18	43/0.16	1.21		2.03	4.5				6.7	23.8	
	16	54/0.18	1.53		2.35	5.2				7.4	14.9	
4	24	11/0.16	0.61	0.41	1.43	3.6	0.12	80	0.81	5.8	88.0	100
	22	17/0.16	0.76		1.58	3.9				6.1	59.3	
	20	26/0.16	0.94		1.76	4.4				6.6	37.7	
	18	43/0.16	1.21		2.03	5				7.2	23.8	
	16	54/0.18	1.53		2.35	5.8				8.0	14.9	

- Note :**
- Standard for safety File No. : UL : E106028
 - BCC specification No. : ELA 012/0108
 - Cable without shield is available, upon request (BCC specification No. : ELA 051/0608)