


UL approved Lead Free PVC Multi Pair Computer Cable with Shield (UL2464-SB-LF)

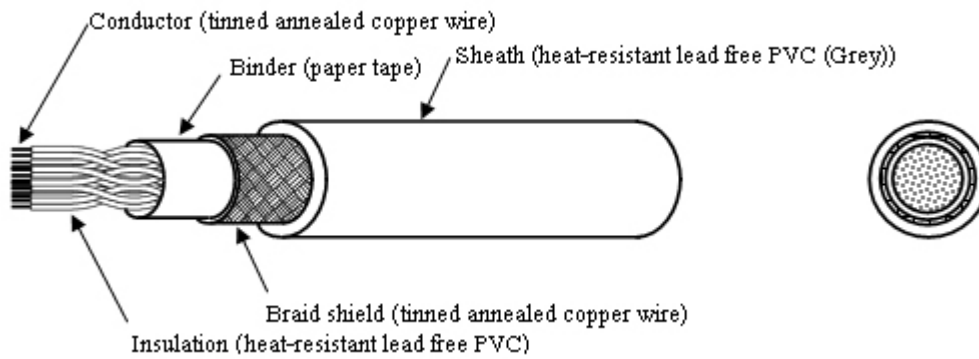

Description UL 2464-SB-LF
Rating 80 °C, 300V
Standard UL Subject 758
Construction :
Marking AWM E106028 STYLE 2464 LF VW-1 BANGKOK CABLE

No. of cores	Conductor			Insulation		Diameter of assembly Approx. (mm)	Shield		Jacket thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20°C) Maximum (W/km)	Standard Length (m/coil)
	Size (AWG)	Construction (No./mm)	Diameter Approx. (mm)	Thickness Nominal (mm)	Diameter Approx. (mm)		Size (mm)	Coverage Minimum (%)				
5	26	7/0.16	0.48	0.33	1.04	5.3	0.12	80	0.81	7.7	142	200
8						6.4				8.7		200
10						7.1				9.5		200
13						8.1				10.4		100
17						9.3				11.6		100
18						9.5				11.8		100
20						10.0				12.4		100
25						11.2				13.5		100
5	28	7/0.127	0.38	0.33	1.04	5.1	0.12	80	0.81	7.4	228	200
8						5.9				8.2		200
10						6.6				8.9		200
13						7.5				9.8		200
17						8.6				10.9		100
18						8.8				11.1		100
20						9.3				11.6		100
25						10.4				12.7		100

- Note :**
- Standard for safety File No. : UL : E106028
 - BCC specification No. : ELA 013/0108
 - Cable without shield is available, upon request (BCC specification No. : ELA 051/0608)