


### Lead Free PVC Insulated Cabtyre Round Cord (VCTF-LF)

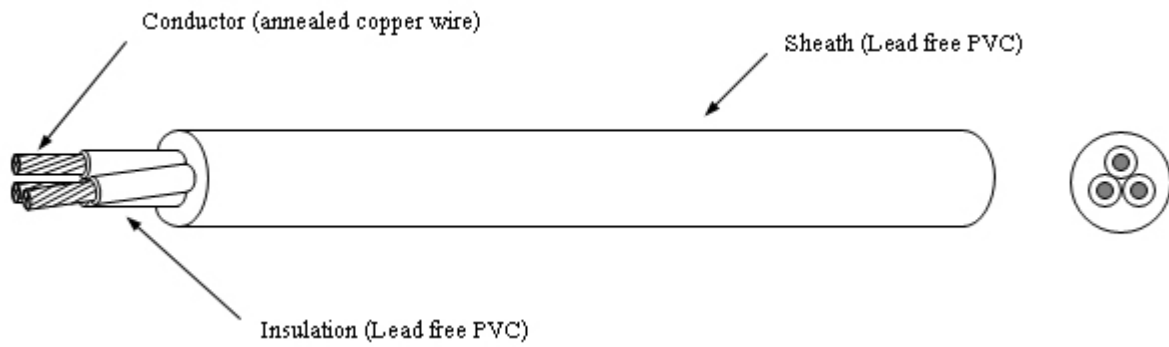

**Description** VCTF-LF  
**Rating** 60°C, 300V  
**Standard**  
**Construction** :  
**Marking** BANGKOK CABLE VCTF ☆☆☆X \*.\* mm<sup>2</sup> LF

Number of core	Conductor			Insulation thickness	Sheath Thickness	Overall diameter	Conductor resistance (at 20°C)	Mass	Standard Length
	Nominal sectional area (mm <sup>2</sup> )	Construction (No./mm)	Diameter Approx. (mm)						
				Nominal (mm)	Nominal (mm)	Approx. (mm)	Maximum (ohm/km)	Approx. (kg/km)	(m/coil)
2	0.75	30/0.18	1.1	0.6	1.0	6.6	25.1	60	100
	1.25	50/0.18	1.5	0.6	1.0	7.4	15.1	80	100
	2.0	37/0.26	1.8	0.6	1.0	8.0	9.8	100	100
3	0.75	30/0.18	1.1	0.6	1.0	7.0	25.1	70	100
	1.25	50/0.18	1.5	0.6	1.0	7.8	15.1	95	100
	2.0	37/0.26	1.8	0.6	1.0	8.5	9.8	120	100
4	0.75	30/0.18	1.1	0.6	1.0	7.6	25.1	90	100
	1.25	50/0.18	1.5	0.6	1.0	8.5	15.1	120	100
	2.0	37/0.26	1.8	0.6	1.0	9.3	9.8	150	100

**Note :**

1. BCC specification No. : ELA 017/0108
2. ☆☆☆ : Number of cores
3. \*.\* : Size of conductor