


Lead Free PVC Insulated Single Core Cord (VSF-LF)

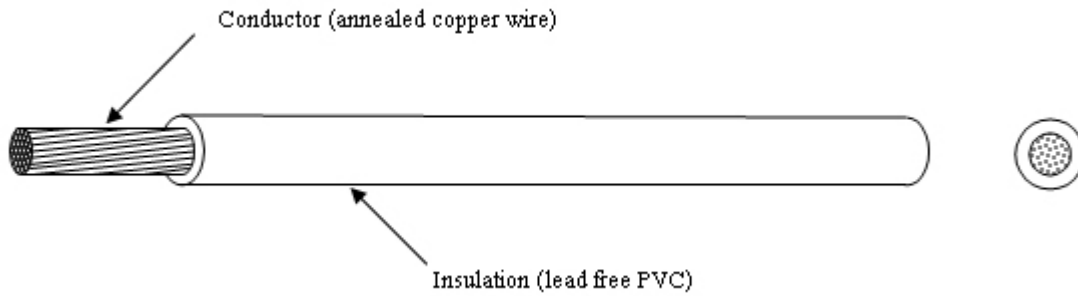

Description	VSF-LF
Rating	60 °C, 300V
Standard	
Construction	:
Marking	BANGKOK CABLE VSF *.* mm ² LF

Nominal sectional area (mm ²)	Conductor		Insulation thickness Nominal (mm)	Overall diameter Approx. (mm)	Conductor resistance (at 20° C) Maximum (ohm/km)	Mass Approx. (kg/km)	Standard Length (m/coil)
	Construction (No./mm)	Diameter Approx. (mm0)					
0.3	12/0.18	0.72	0.8	2.3	61.0	8	450
0.5	20/0.18	0.93	0.8	2.5	36.7	11	450
0.75	30/0.18	1.14	0.8	2.7	24.4	14	450
1.25	50/0.18	1.47	0.8	3.1	14.7	20	300
2.0	37/0.26	1.83	0.8	3.4	9.5	27	300
3.5	45/0.32	2.48	0.8	4.1	5.1	45	300

- Note :**
1. BCC specification No. : ELA 014/0108
 2. *.* : Size of conductor