


Lead Free PVC Insulated Wire (IV-LF)

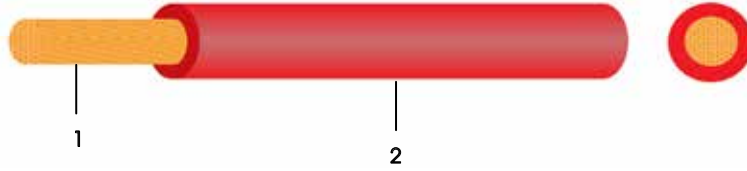

Construction

1. Conductor : Annealed copper wire (A)
2. Insulation : Lead free PVC

Reference Standard

JIS C 3307

Classification

60 °C, 600V

Marking

<PS>E JET BANGKOK CABLE HOSODA IV *.* mm² LF

Application

General electric installations and wiring of electric machinery and apparatus at 600 V or under.

Cross-sectional area mm ²	Conductor		Thickness of insulation mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20 °C Ω/km (Max.)	Cable weight kg/km (Approx.)	Standard length m/coil
	No. & dia. of wire No./mm	Diameter mm (Approx.)					
0.9	7/0.4	1.2	0.8	2.8	20.9	16	300
1.25	7/0.45	1.35	0.8	3.0	16.5	19	300
2.0	7/0.6	1.8	0.8	3.4	9.24	28	300
3.5	7/0.8	2.4	0.8	4.0	5.20	45	300

Note

1. BCC specification No. : ELA 018/0108
2. *.* : Size of conductor
3. DENAN approval No. : JET 6133-12001-1001