


Lead Free PVC Insulated Flat Cord (VFF-LF)

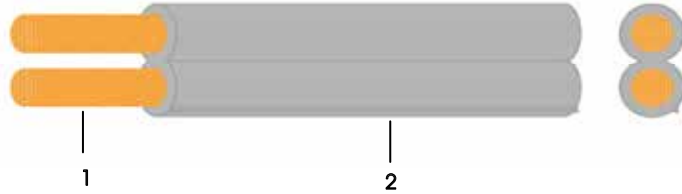

Construction

- 1. Conductor : Annealed copper wire (A)
- 2. Insulation : Lead free PVC

Reference Standard

JIS C 3306

Classification

60 °C, 300V

Marking

<PS>E JET BANGKOK CABLE HOSODA VFF *.* mm² LF

Application

Intended for use in small electric appliance of a.c. 300V or under principally for indoor services.

Conductor			Thickness of insulation	Overall diameter	Conductor resistance at 20 °C	Cable weight	Standard length
Cross-sectional area	No. & dia. of wire	Diameter					
mm ²	No./mm	mm (Approx.)	mm (Nominal)	mm (Approx.)	Ω/km (Max.)	kg/km (Approx.)	m/coil
0.5	20/0.18	0.93	0.8	2.5 x 5.0	36.7	22	100
0.75	30/0.18	1.14	0.8	2.7 x 5.4	24.4	28	100
1.25	50/0.18	1.47	0.8	3.1 x 6.2	14.7	40	100
2.0	37/0.26	1.83	0.8	3.4 x 6.8	9.5	55	100

Note

1. BCC specification No. : ELA 015/0108
2. *.* : Size of conductor
3. DENAN approval No. : JET 6133-12011-1001